



AH503 - SW45090

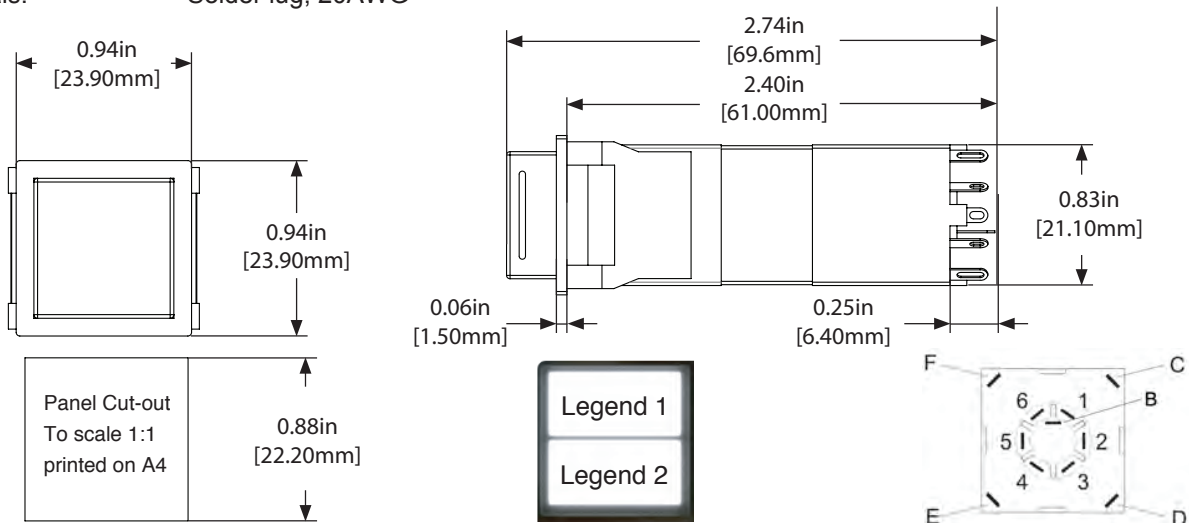


Specifications

Ratings: 30volts DC or 125volts AC
 2.0Amps Resistive, 0.5Amps Inductive
Type: Momentary and Latching options
Life: 100,000 cycles minimum
Weight: 0.8oz (23g) Max
Operating pressure: 2lbs. +/-1lbs. (908g +/-454g)
Plunger Travel: 0.187" (4.7mm) approx
LEDs: 50mA Nominal (80mA Max),
 Forward Voltage 6.45V per legend set
 Current limiting resistor for 14V systems
Terminals: Solder lug, 20AWG

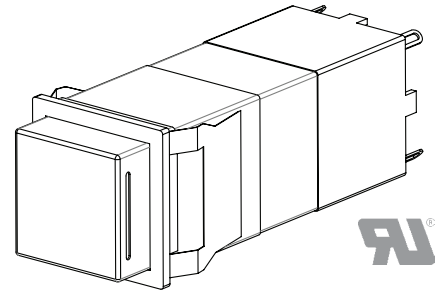

Specifying Switches

- Specify switch from table below then "-"
- Next the legend lens type required (as below) then "-"
 "D" (optical Diffuser blank), "B" (solid Black paint over optical diffuser blank)
 "C" (Custom)
 Note: "D" blank for customers own marking, "B" for customers own laser etching.
- Specify LED color in the order upper then lower (as below) then "-"
 Native LED colors Red(R), Yellow(Y), Green(G) and White(W).
- For custom text, specify upper legend text 1 then "-"
- For custom text, specify lower legend text 2 then "-"
- Specify Positive(P) or Negative(N) text (Positive is black letters on illuminated diffuser)
- Specify text manufacturing type Laser engraved "L", Silk Screen "S"

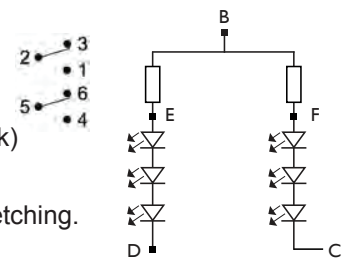

Example

A combined Master Warning Master Caution with momentary switch with custom silk screen legends would be:
501-001-C-RY-Warning-Caution-N-S

P/N	Type
501-001	Momentary
501-011	Latching



www.aerosafety.com